
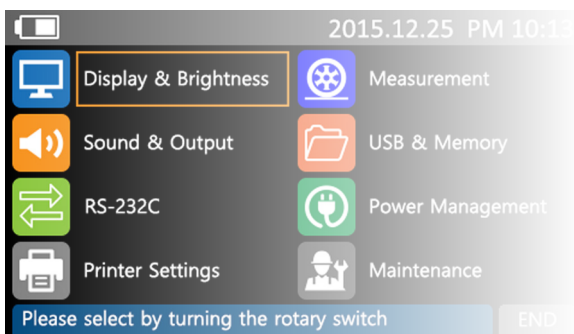


PORTABLE WEIGHING INDICATOR

CMI-6S

MULTI 6-CHANNEL

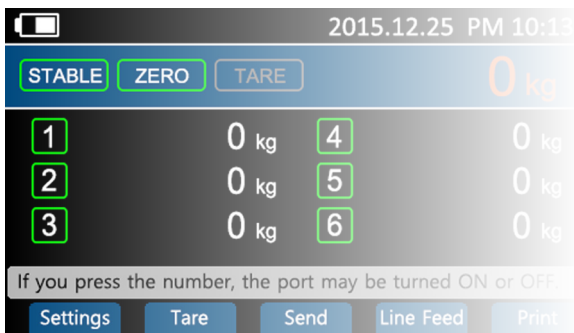

DIAPLAY	Full color 4.3inch TFT
MEMORY	1,000,000,000 weighing data
WIRELESS (OPTION)	Zigbee
INPUT SENSITIVITY	0.2uV/D
INPUT SIGNAL RANGE	0~39mV
NON LINEARITY	$\pm 0.0015\%$ of FSR max.
LOAD CELL EXCITATION	DC 5V \pm 5%, 300mA
EFFECTIVE RESOLUTION	24bit
OUTPUT DATA RATE	10 to 50 measurements per second
PRINTER	Direct line thermal printer
INTERFACE	RS232C / 1 input and 3 output
USB PORT	For memory stick & firmware upgrade
BATTERY	Rechargeable Li-ion pack + PCM
CHARGER	SMPS 12VDC, 2A
OPERATING TIME	Approx. 80hr
OPERATING TEMPERATURE	-20 $^{\circ}$ C ~ 60 $^{\circ}$ C
OPERATING HUMIDITY	85% R.H. (no condensation)
PRODUCT WEIGHT	2.7kg

- High resolution TFT LCD
- Simple operation
- Compact & lightweight
- USB host control

