


BLUETOOTH INDICATOR

AMI-100

FOR INDUSTRIAL SCALES

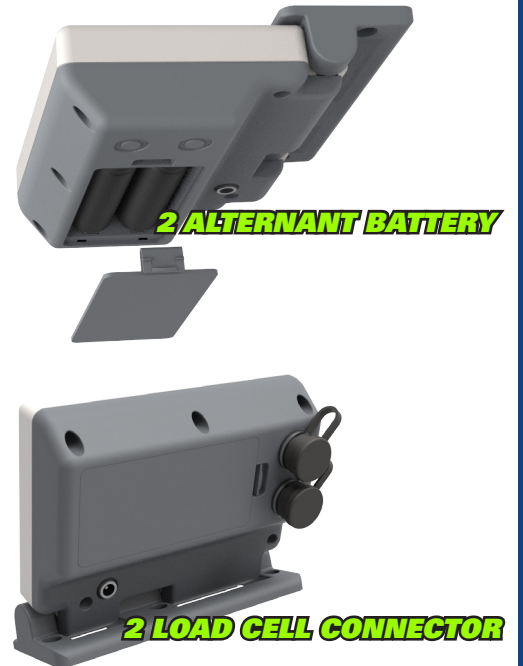

- Wall or ceiling mounting indicator
- Long battery life
- Free angle adjustment with friction hinge
- BLE 5.x

DISPLAY	FSTN LCD 5digit & LED backlight
SWITCHS	5 tact switchs & 1 power switch
CASE MATERIAL	ABS
EFFECTIVE RESOLUTION	24bits
EXTERNAL RESOLUTION	Up to 100,000 counts
INPUT SENSITIVITY	0.2uV/D
INPUT RANGE	0 ~ 39mV
OUTPUT DATA RATE	4.7 to 4.8K measurements per second
BATTERY & OPERATING TIME	18650 Li-Ion battery / Approx. 1,000hrs
CHARGER	Exclusive 18650 charger
WIRELESS METHOD	Bluetooth (BLE 5.x)
INDOOR/URBAN RANGE	20m international variant
OPTIONS	OP01: USB / OP02: 2 load cell / OP03: Power adaptor
OPERATING TEMPERATURE	-20°C ~ 60°C
OPERATING HUMIDITY	85% R.H. (no condensation)
PRODUCT WEIGHT	Approx. 0.4kg

